Part No. 270494

STRANDS PRO DYNAMIC INDICATOR RELAY

WIRING INSTRUCTIONS

- *Incoming cable*
- *Outgoing cable*
  check info below

TYPE OF CONNECTION: Loose wires


ADDITIONAL INFORMATION

Incoming Cables to main power:
*1: **Red:** + Positive*
***2: Black:** (-) Negative*

Outgoing Cables to light units:
** All four output channels has red/black cables.*
***Red: +** Positive*
***Black:** (-) Negative*

**4 Output Channels with a Maximum of 30W per Channel.*
**The controller's ON/OFF cycle is set as 200ms for dynamic indicator effect.*

TECHNICAL DRAWING

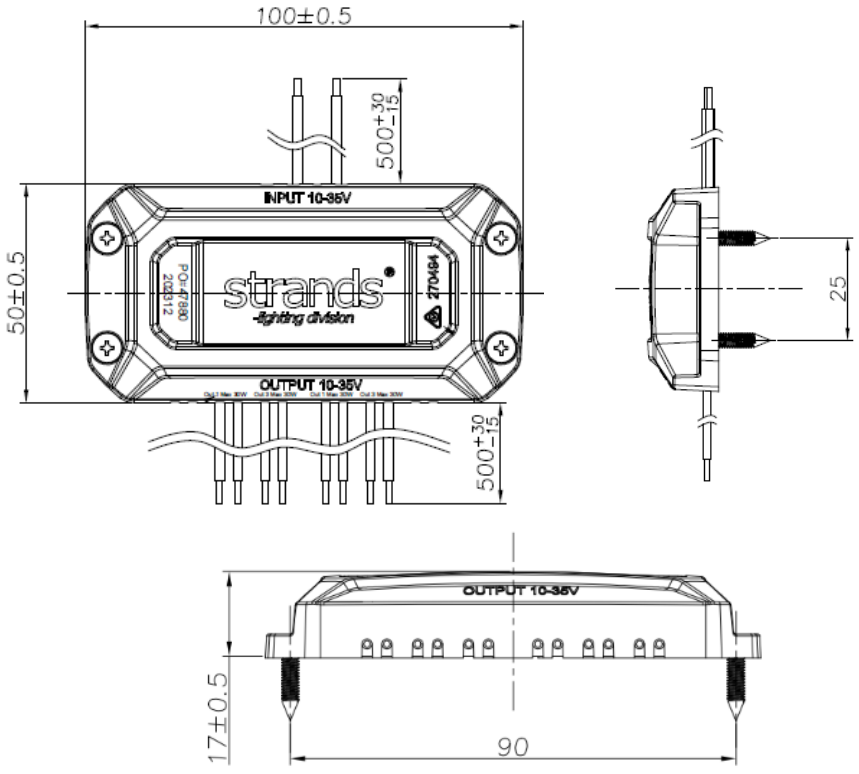

INCLUDED IN PACKAGE:

- *Screws: 4 pcs self tapping screws ST3.5X16PA*
- *Cable specification: Red/Black 2mm²*

READ ALL THE INSTRUCTIONS AND STUDY THE DIAGRAMS BEFORE INSTALLING NEW LIGHT!

LEGAL MOUNTING

- Please check state and local laws for proper usage and mounting. Strands will not be responsible for products mounted incorrectly or in violation of local laws (e.g., ECE R48 regulation for the EU)

PRODUCT CARE

- Clean the product with lukewarm water and an alkaline degreaser. Avoid strong chemicals; rinse immediately if exposed. Do not use a pressure washer for cleaning.
- Take care if your light has a breather. Ensure it is protected against rain and dust, especially if it has a sticker breather. Damage to the breather due to incorrect installation will void the warranty.
- Internal moisture is normal and will dissipate through the breather vent after several days of use.
- We do not recommend painting the product housing. If paint is still applied, please ensure the breather is protected and an oven is not used for curing the paint. Otherwise, the warranty might be void.

INSTALLATION

- Ensure power is turned off during installation.
- Do not cut the connector cable to less than 50 cm. If the original cable is already shorter than 50 cm, leave it as is. Otherwise, the warranty will be void.
- Make sure to use only the correct accessories included in the package. Installation errors may void the warranty.
- Tighten screws, washers, and nuts to prevent them from loosening or chafing. Do not overtighten screws to avoid damaging the product's protective components.
- Use a watertight solution for wiring connections.

WARNING!

- For safe operation, use only the voltage specified in the product description. This light becomes hot under continuous use. Do not remove or touch the casing for at least 30 minutes after turning the lamp off