



# TECHNICAL DATA AND INSTALLATION GUIDE

TWO - Combi box with grille

## **Ravensberg Consulting AB**

Stridbecksliden 4 SE302 33 Halmstad Sweden

Jacob Ravensberg jacob.ravensberg@ravensberg.se +46733 88 77 40

Pieter Ravensberg pieter.ravensberg@ravensberg.se +46708 88 77 34

www.Ravensberg.se



- The TWO Combi Box with Grill is suitable for mounting on outside walls.
- ♣ The combi box has been designed so that the fresh air intake and exhaust air are very well separated to avoid mixing.
- ♣ The combi box can be mounted with the exhaust-air outlet either on the right or the left.
- Standard powder-coated is: black (RAL 9005), and white (RAL 9003). red (RAL 8004) and red (RAL 3009)
- It is possible to choose any RAL color. MOQ will apply.
- ♣ Material: galvanizing steel, powder coated





## • TWO - Item Number:

TWO - Item number	Product Description
TWO-125	TWO - Combi Box with Grill, Ø125, Black
TWO-125B	TWO - Combi Box with Grill, Ø125, Black, RAL 9005
TWO-125W	TWO - Combi Box with Grill, Ø125, White, RAL 9003
TWO-160	TWO - Combi Box with Grill, Ø160
TWO-160B	TWO - Combi Box with Grill, Ø160, Black, RAL 9005
TWO-160W	TWO - Combi Box with Grill, Ø160, White, RAL 9003
TWO-200	TWO - Combi Box with Grill, Ø200
TWO-200B	TWO - Combi Box with Grill, Ø200, Black, RAL 9005
TWO-200W	TWO - Combi Box with Grill, Ø200, White, RAL 9003
TWO-250	TWO - Combi Box with Grill, Ø250
TWO-250B	TWO - Combi Box with Grill, Ø250, Black, RAL 9005
TWO-250W	TWO - Combi Box with Grill, Ø250, White, RAL 9003


# • Technical Parameters

#### Products Dimension:

TWO	Α	В	С	D	ØΕ
Ø125	500	235	100	250	125
Ø160	500	235	100	250	160
Ø200	620	315	100	310	200
Ø250	720	365	100	360	250

Technical Data TWO / 11.08.2022 / REV.0



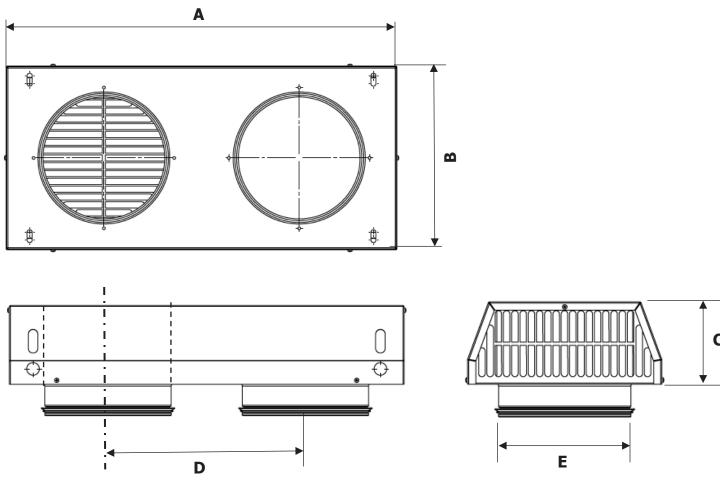


# > Performances- Graphs :


Technical Data TWO / 11.08.2022 / REV.0



#### 1. TWO - Combi Box Fresh Air

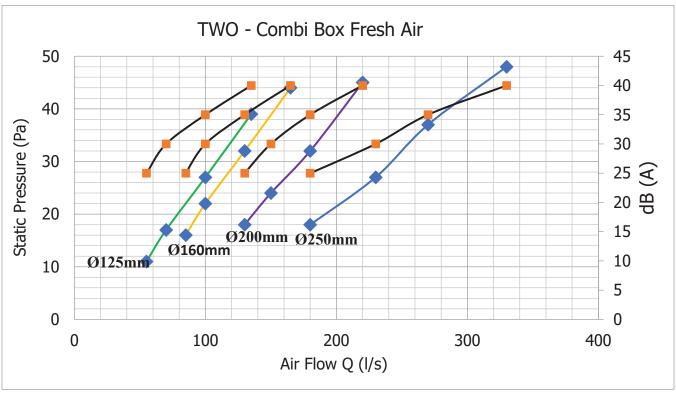

#### 2. TWO - Combi Box Exhaust Air

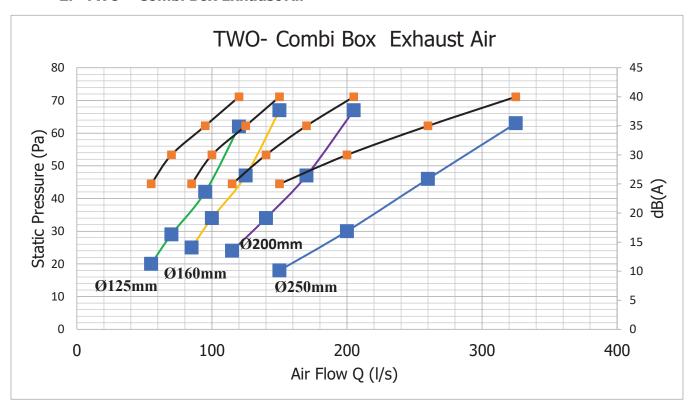

Technical Data TWO / 11.08.2022 / REV.0



#### • Installation:

- ♣ The TWO-Combi Box with Grille is easily mounted on the wall by removing the front part by unscrewing the 6 screws on the part sides and mounting the back piece to the wall with 4 screws.
- ♣ The combi box can be mounted with the exhaust-air outlet either on the right or the left.
- We recommend using a sealant between the back piece of the combi box with grill and wall to avoid water entering the building.